

**SCG****PT. SCG LIGHTWEIGHT CONCRETE INDONESIA**JL. Surya Tekno KAV I-T1-3 Suryacipta City Of Industry,
Kutamekar, Ciampel Jawa Barat 41361 Indonesia

Phone : 0267-8610361

Fax : 0267-8610360

N.P.W.P : 31.567.302.0-433.000

PURCHASE ORDERTo : PT INDO LANKA UTAMA
JL. Raya Jakarta Bogor Km.43 Cirimekar
Cibinong, Bogor 16917
Indonesia

PO No. : 4021012780

PO Date : 26.09.2022

PO Currency : IDR

Phone : (021) 83715915

Fax :

N.P.W.P :

Please supply the following item

No.	Material Code	Item Description	Qty	Unit	Delivery Date	Unit Price	Total Amount	Discount
10		Mobilization and installation Silo PFA	1	LOT	06.10.2022	61,876,000 / 1	61,876,000	0

Delivery To : PT SLCI
JL. Surya Tekno KAV I-T1-3 Suryacipta City Of Industry,
Karawang 41361 Indonesia

Total Prices 61,876,000



PPN (VAT) 6,806,360

Grand Total 68,682,360

Term of Payment : Credit 30 days after received bill

Remarks : PR 1021012554

Wajib mematuhi aturan keselamatan yang berlaku di PT SLCI
Termasuk crane 45 ton, lowbed trailer, crane 60 ton,
dan instalasi silo pada structure

Prepared By	Checked By	Approved By	Confirmed By (Vendor)
 Arfandi			

No.	Mobilization & Installation	VOLUME		PT Indo Lanka		PT Griya Banyu Biru		CV Arsha Utama		REMARK
				Unit Price	Total	Unit Price	Total	Unit Price	Total	
1	Telescopic Crane 45 Ton	1,00	Ls	13.500.000,00	13.500.000,00	12.500.000,00	12.500.000,00	14.500.000,00	14.500.000,00	Plant Jayamix SCG Cibitung
2	Lowbed Trailer 40 ft	1,00	Ls	8.500.000,00	8.500.000,00	10.000.000,00	10.000.000,00	9.500.000,00	9.500.000,00	Silo 1 Pc
4	Telescopic Crane 60 Ton	2,00	Ls	15.000.000,00	30.000.000,00	18.000.000,00	36.000.000,00	16.500.000,00	33.000.000,00	SLCI Factory Karawang
5	Manpower	1,00	Ls	3.375.000,00	3.375.000,00	12.000.000,00	12.000.000,00	9.000.000,00	9.000.000,00	Loading, Unloading, Installation Silo
7	Lynatech D 12" + Hose Clamn 12"	1,00	Ls	600.000,00	600.000,00	2.600.000,00	2.600.000,00	600.000,00	600.000,00	
8	Dudukan screw UNP 100 50 5	1,00	Ls	5.901.000,00	5.901.000,00	1.500.000,00	1.500.000,00	2.750.000,00	2.750.000,00	
TOTAL					61.876.000,00		74.600.000,00		69.350.000,00	

Juy

PURCHASE REQUEST CHECK APPROVAL

ITEM DESCRIPTION

[Download PDF! \(https://iot.slci.co.id/download_PR/1021012554\)](https://iot.slci.co.id/download_PR/1021012554)

PR Number : 1021012554
Total Price : IDR 62,000,000
Attachment : [Click here \(https://iot.slci.co.id/assets/lampiranpr/PR_1021012554_13731.JPG\)](https://iot.slci.co.id/assets/lampiranpr/PR_1021012554_13731.JPG)

Details PR

No.	Item	A	Material	Short Text	Quantity	Unit	Delivery Date	Plant	Matl.Group	PGR	Value
1	10	F		Mobilisation and installation Silo PFA	1	LOT	28.09.2022		Asset; AUC	DBA	62,000,000

Purpose:

[10] MOBilisation Silo PFA from cibitung, include telescopic 40t and 60t (installation Silo at SLCI)

GL: 910030

IO: 201020000230

Dibuat Oleh,
90031(Sigit Setiyono)
2022-09-22 15:34:39

Checked by,
90156(Mochamad Nugrahaputra)
Approved at 2022-09-24
06:23:55

Budget Control,
90696(Mukhtar L)
Approved at 2022-09-24
09:10:32

Approved by,
90005(Vorapong Panavasus)
Approved at 2022-09-24
12:28:52



PT. INDO LANKA UTAMA

General Trading | Mechanical part | Sipil Construction

PROJECT : New Silo Storage for SLCI Factory
 SUB PROJECT : Install New Silo
 LOCATION : SCG Lightweight Concrete Indonesia, Karawang
 YEAR : 2022

NO.	DESCRIPTION	VOLUME	LABOUR UNIT PRICE	MATERIAL UNIT PRICE	TOTAL PRICE	REMARK
4	Anchor Bolt M24	16.00 Point	Rp 150,000.00	Rp 150,000.00	Rp 4,800,000	
B	Pondasi Sumuran 1,2x1,2x2m					
5	Bobokan Beton (Breaking Concrete)	2.88 m3	Rp 1,100,000.00		Rp 3,168,000	
6	Concrete K250	2.88 m3	Rp 200,000.00	Rp -	Rp 576,000	
7	Steel Rebar 5D13	10.20 kg	Rp 10,000.00	Rp 20,000	Rp 306,000	
8	Steel Rebar D8-300	13.27 kg	Rp 10,000.00	Rp 20,000	Rp 398,160	
III	Mobilization & Installation				Rp 48,076,000	
1	Telescopic Crane 45 Ton	1.00 Ls		Rp 13,500,000	Rp 13,500,000	
2	Lowbed Trailer 40 ft	1.00 Ls		Rp 8,500,000	Rp 8,500,000	
3	Telescopic Crane 60 Ton	1.00 Ls		Rp 15,000,000	Rp 15,000,000	
4	Manpower	1.00 Ls	Rp 3,375,000.00		Rp 3,375,000	
5	Hanger Screw Conveyor to existing Structure	6.00 set		Rp 200,000.00	Rp 1,200,000	
6	Lynatech D 12" + Hose Clamn 12"	2.00 set	Rp 50,000	Rp 250,000	Rp 600,000	
7	Area weighter UNP 100.50.5	1.00 Set	Rp 2,388,500	Rp 3,512,500	Rp 5,901,000	
IV	Dismantle & Install Tangga exsisting	750.00 Kg	Rp 9,500		Rp 7,125,000	
V	Rekondisi Impeller				Rp 6,000,000	
1	Impeller Dia 330 & Base Plate	1.00 Lot	Rp 4,500,000.00	Rp -	Rp 4,500,000	
2	Install Impeller& Base plate	1.00 Lot	Rp 1,500,000.00	Rp -	Rp 1,500,000	
VI	Additional Screw				Rp 130,080,000	
1	New Screw Conveyor 12" L = 6m (WAM)	2.00 Set		Rp 65,040,000	Rp 130,080,000	
VII	Speed Reducer				Rp 3,764,925	
1	Joint Flange Pipe 4"	JIS 10K 2.00 Pcs	Rp 5,000.00	Rp 150,000.00	Rp 310,000	
2	Steel Pipe	pipe 4 " Sch 40 -300L 9.60 kg	Rp 9,500.00	Rp 50,000.00	Rp 571,200	
3	Side cover	Plate Ss 400, t6mm x Dia 500 23.55 kg	Rp 9,500.00	Rp 25,000.00	Rp 812,475	
4	Main Cylinder Dia 500	Plate Ss 400, t6mm 33.00 kg	Rp 9,500.00	Rp 35,000.00	Rp 1,468,500	
5	Bolt, Nut & Washer	M8 12.00 Pcs	Rp 1,000.00	Rp 5,000.00	Rp 72,000	
6	Painting Primer & Finish	1.00 Lot	Rp 200,000.00	Rp 330,750.00	Rp 530,750	
VIII	Chute cement silo				Rp 2,505,083	
1	Base Plate	Ss 400, t12mm.420.500 19.78 kg	Rp 9,500.00	Rp 25,000.00	Rp 682,479	
2	Chute	Ss 400, t8mm 50.24 kg	Rp 9,500.00	Rp 22,000.00	Rp 1,582,560	
3	Painting Primer & Finish	1.00 Lot	Rp 100,000.00	Rp 140,044.00	Rp 240,044	

material beton supply by r i

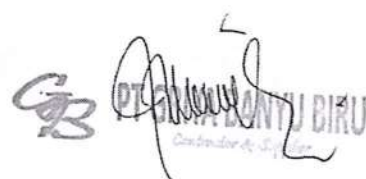
need 2 days

RENCANA ANGGARAN BIAYA/BILL OF QUANTITY

PROJECT : New Silo Storage for SLCI Factory
 SUB PROJECT : Install New Silo
 LOCATION : SCG Lightweight Concrete Indonesia, Karawang
 YEAR : 2022

NO.	URAIAN PEKERJAAN/DESCRIPTION	VOLUME	LABOUR UNIT PRICE	MATERIAL UNIT PRICE	TOTAL PRICE	REMARK	
I	Structure Silo 3.5 m				90,839,880.00		
1	Structure Silo HBM 200.200 9m	1,296.62 kg	7,500.00	22,000.00	38,250,290.00		
2	Bracing L70.70	497.64 kg	7,500.00	20,000.00	13,685,100.00		
3	Steel Connecting to existing Silo HBM 200.200	127.92 kg	7,500.00	22,000.00	3,773,640.00		
4	Silo Cleaning and Painting	1.00 Ls	3,500,000.00	4,000,000.00	7,500,000.00		
5	Steel Plate t = 18mm	228.91 kg	6,000.00	20,000.00	5,951,556.00		
6	Inlet & Outlet Med pipe 4"	170.66 kg	7,500.00	22,000.00	5,034,470.00		
7	Flange & Conector tanker Ladder vertical	2.00 set	500,000.00	600,000.00	2,200,000.00		
8	Plat Strip Horizontal 2,5 x 30 mm	197.82 kg	7,500.00	20,000.00	5,440,050.00		
9	Plat Strip Vertical 2,5 x 30 mm	199.50 kg	7,500.00	20,000.00	5,486,250.00		
10	Steel Pipe Med 3/4"	52.20 kg	7,500.00	22,000.00	1,539,900.00		
11	Steel Pipe Med 1/2"	67.07 kg	7,500.00	22,000.00	1,978,624.00		
II	Foundation				18,877,940.00		
A	Concrete Plat 4 x 4 x 0.6						
1	Concrete K350	9.60 m3	120,000.00	-	1,152,000.00		
2	Steel Rebar D13	576.00 Kg	3,500.00	14,000.00	10,080,000.00		
3	Formwork	9.60 m2	60,000.00	150,000.00	2,016,000.00		
4	Anchor Bolt M24	16.00 Point	50,000.00	125,000.00	2,800,000.00		
B	Pondasi Sumuran 1,2x1,2x2m						
1	Bobokan Beton (Breaking Concrete)	2.16 m3	1,000,000.00	-	2,160,000.00		
2	Concrete K250	2.16 m3	120,000.00	-	259,200.00		
3	Steel Rebar SD13	10.20 kg	3,500.00	14,000.00	178,500.00		
4	Steel Rebar D8-300	13.27 kg	3,500.00	14,000.00	232,260.00		
III	Mobilization & Installation				86,760,000.00		
1	Telescopic Crane 45 Ton	Plant Jayamix SCG Cibitung	1.00 Ls	12,500,000.00	-	12,500,000.00	
2	Lowbed Trailer 40 ft	Silo 1 Pc	1.00 Ls	10,000,000.00	-	10,000,000.00	
3	Trailer 40 ft	Structure Silo + Ladder	1.00 Ls	6,000,000.00	-	6,000,000.00	
4	Telescopic Crane 60 Ton	SLCI Factory Karawang	1.00 Ls	36,000,000.00	-	36,000,000.00	
5	Mainpower	Loading, Unloading, Installation Silo & Screw	1.00 Ls	12,000,000.00	-	12,000,000.00	
6	Hanger Screw Conveyor to existing Structure Sling rope 12 mm, turn buckle 12 mm		6.00 set	150,000.00	400,000.00	3,300,000.00	
7	Lynatech D-12" + Hose Clam 12"		2.00 set	150,000.00	1,150,000.00	2,600,000.00	
8	Dudukan screw UHP 100 50 5		1.00 lsm	500,000.00	1,000,000.00	1,500,000.00	
9	Rewinding motor screw and Screw overhauling		1.00 Unit	1,000,000.00	500,000.00	1,500,000.00	
10	Kabel Hythy 4x6 20 m		20.00 m	6,000.00	62,000.00	1,360,000.00	
IV	Additional Screw				71,000,000.00		
1	New Screw Conveyor 12" L = 9 m (WAM)	1.00 Set	1,000,000.00	70,000,000.00	71,000,000.00		

→ This amount already for 2 days



PT. BANTU BIRU

 Konsultan & S...

RENCANA ANGGARAN BIAYA/BILL OF QUANTITY

PROJECT : New Silo Storage for SLCI Factory
 SUB PROJECT : Install New Silo
 LOCATION : SCG Lightweight Concrete Indonesia, Karawang
 YEAR : 2022



NO.	URAIAN PEKERJAAN/DESCRIPTION	VOLUME	LABOUR UNIT PRICE	MATERIAL UNIT PRICE	TOTAL PRICE	REMARK
III Mobilization & Installation					86.610.000,00	
1	Telescopic Crane 45 Ton Plant Jayamix SCG Cibitung	1,00 Ls	-	14.500.000,00	14.500.000,00	
2	Lowbed Trailer 40 ft Silo 1 Pc	1,00 Ls	-	9.500.000,00	9.500.000,00	
3	Trailer 40 ft Structure Silo + Ladder	1,00 Ls	-	8.500.000,00	8.500.000,00	
4	Telescopic Crane 60 Ton SLCI Factory Karawang	2,00 Ls	-	16.500.000,00	33.000.000,00	
5	Manpower Loading, Unloading, Installation Silo & Screw	1,00 Ls	9.000.000,00	-	9.000.000,00	
6	Hanger Screw Conveyor to existing Structure Sling rope 12 mm, turn buckle 12 mm	6,00 set	-	500.000,00	3.000.000,00	
7	Lynatech D 12" + Hose Clamn 12"	2,00 set	-	300.000,00	600.000,00	
8	Dudukan screw UNP 100 50 5	1,00 lsm	2.750.000,00	-	2.750.000,00	
9	Rewinding motor screw and Screw overhauling	1,00 Unit	4.500.000,00	-	4.500.000,00	
10	Kabel Nyyhy 4x6 20 m	20,00 m	-	63.000,00	1.260.000,00	